



Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

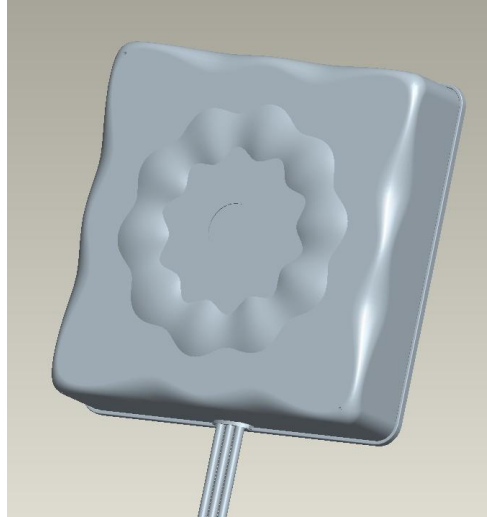

Mechanical dimension

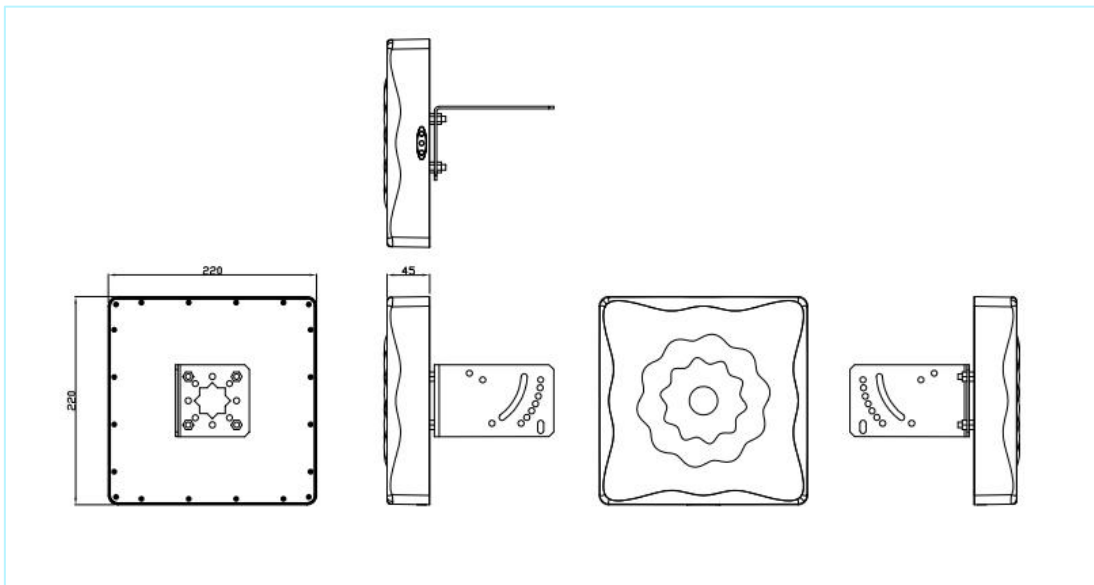

Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

Specifications


Item	Specifications	
Antenna1	Center Frequency	600-6000MHz
	Polarization	Linear
	Gain	6.0dBi
	V.S.W.R	<2.0
	Impedance	50Ω
	Isolation	15dB
Antenna2	Center Frequency	600-6000MHz
	Polarization	Linear
	Gain	6.0dBi
	V.S.W.R	<2.0
	Impedance	50Ω
	Isolation	15dB
Mechanical	Dimension	22cm*22cm*4.5cm
	Cable	Customizable
	Connector	SMA or others
	Mounting Method	Magnet/Adhesive/Screw
Environmental	Operating Temperature	-40°C~+85°C
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

- ◆ Support all 5g, 4G, 3G, GSM and dual band WiFi bands in the world!
- ◆ Single antenna meets all wireless protocol needs, no need to buy other antenna!
- ◆ Up to 6dbi gain for various signal transmitting and receiving scenarios!


Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

Experimental results:

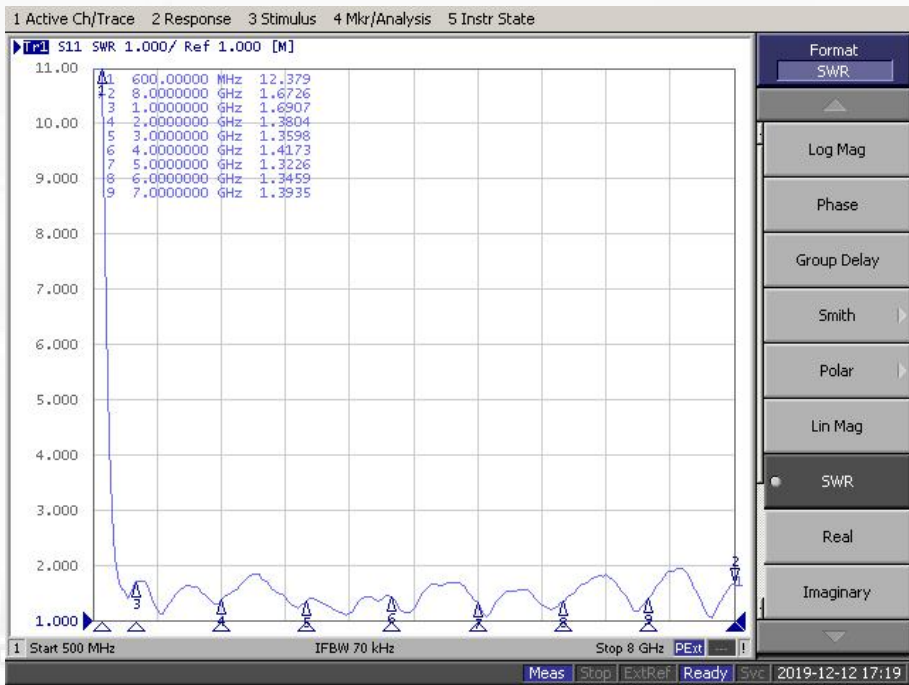

Measured VSWR

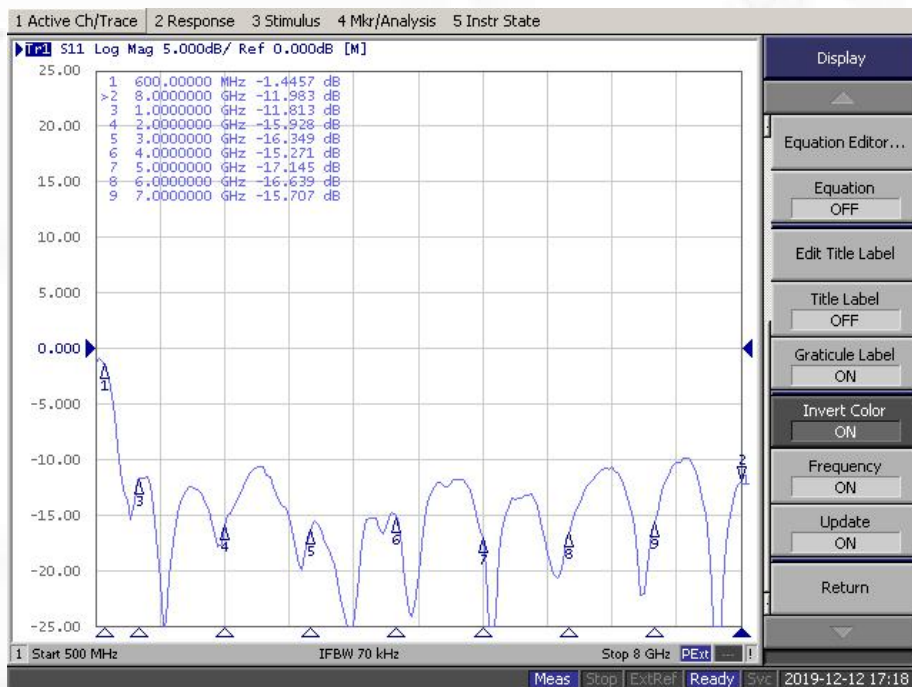


Measured S11


Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

Experimental results: Gain performance

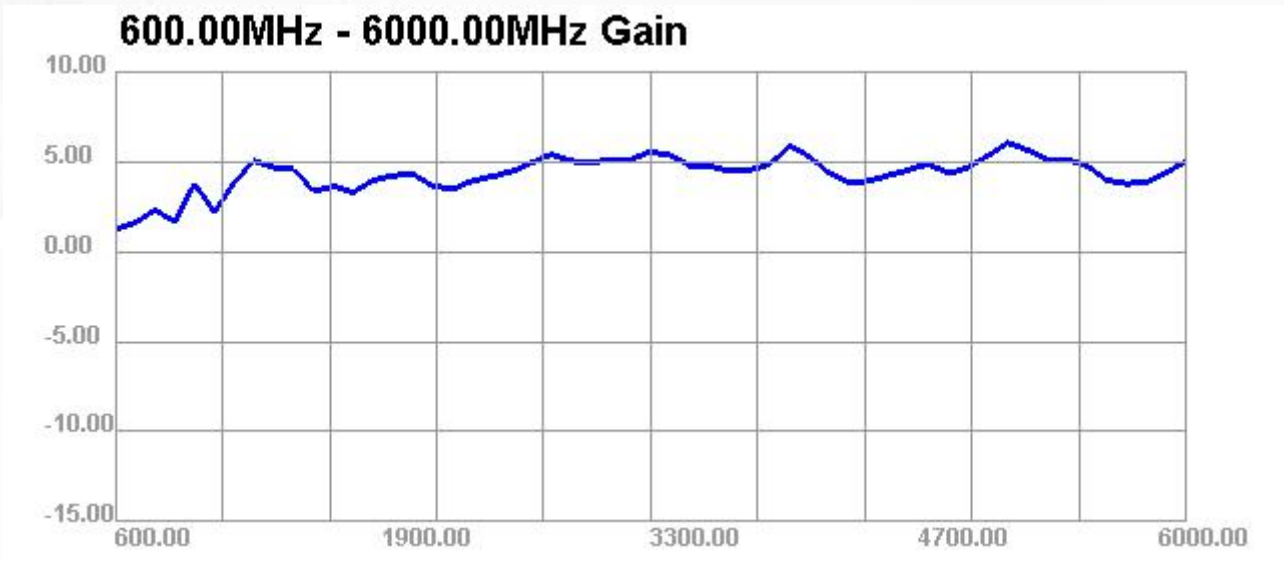

Measurement gain curve

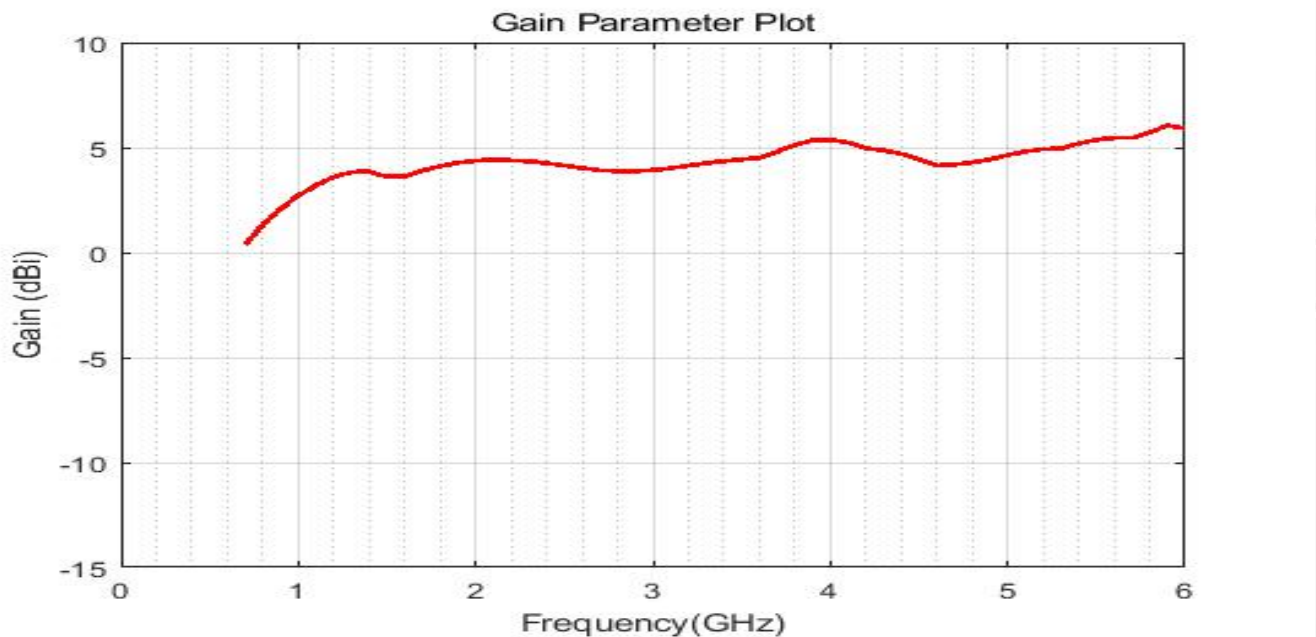


Simulation gain curve


Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

Radiation pattern: low frequency

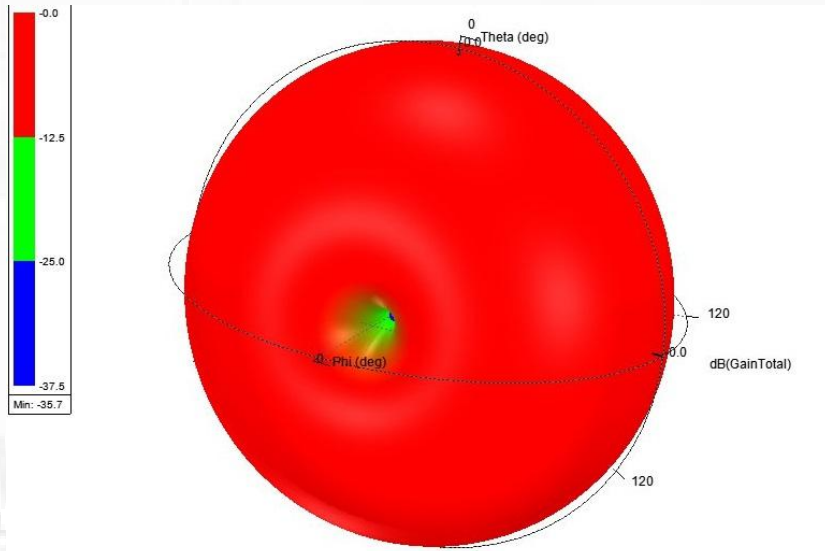

600 MHz

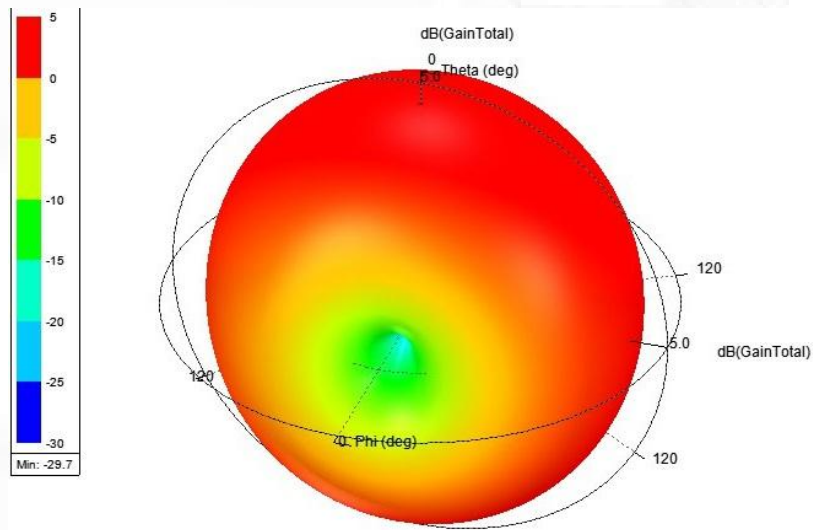


900 MHz


Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

Radiation pattern: intermediate frequency

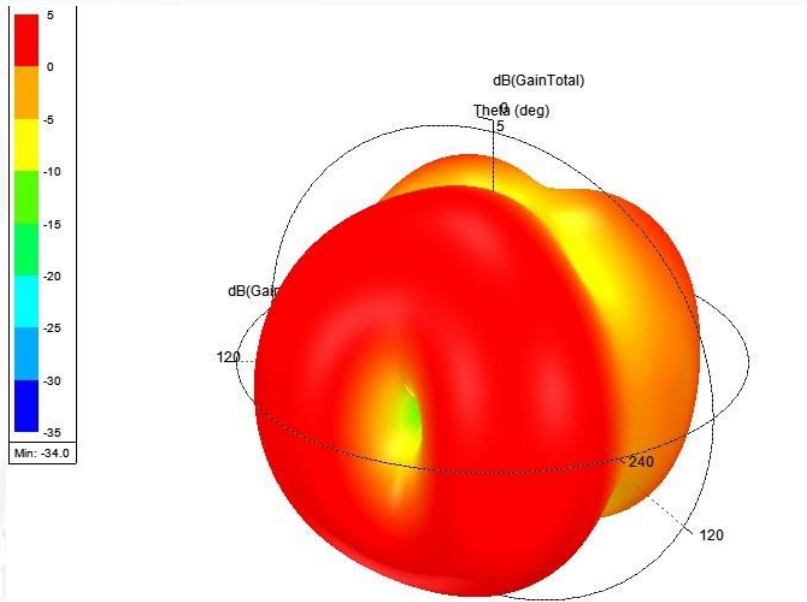

1.8 GHz

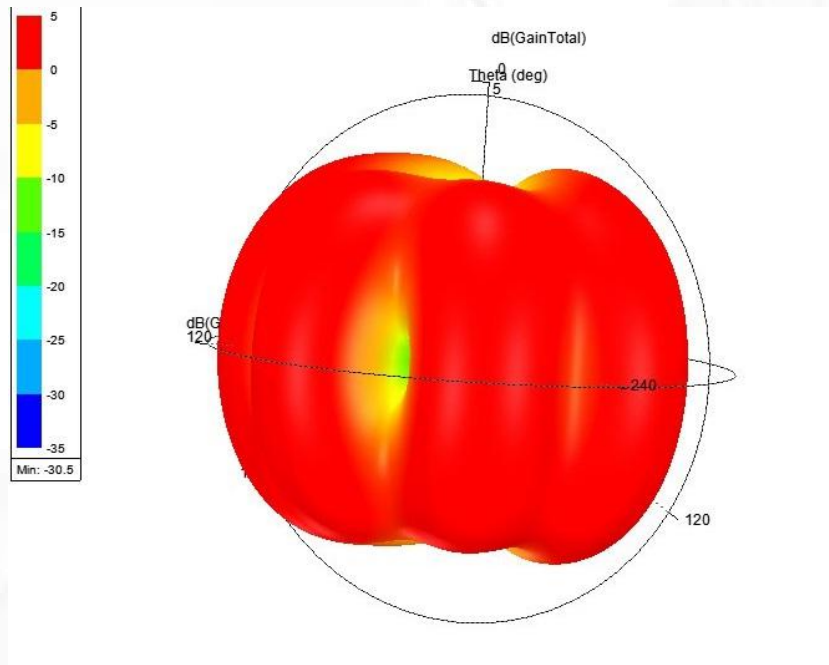


2.6 GHz


Maswell 5G/4G/LTE Panel Antenna MIMO

AN_Master_001-2

Radiation pattern: high frequency

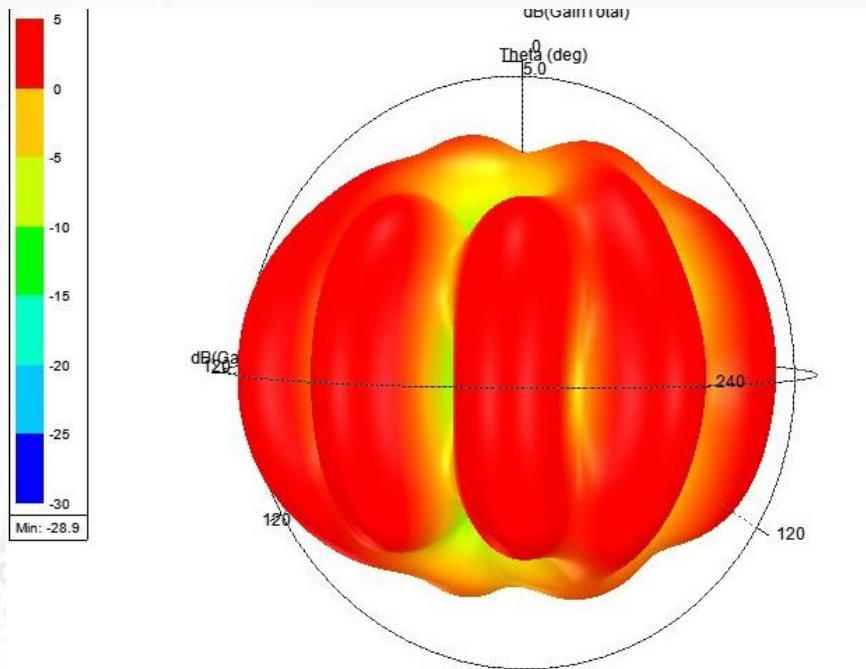

3.5 GHz

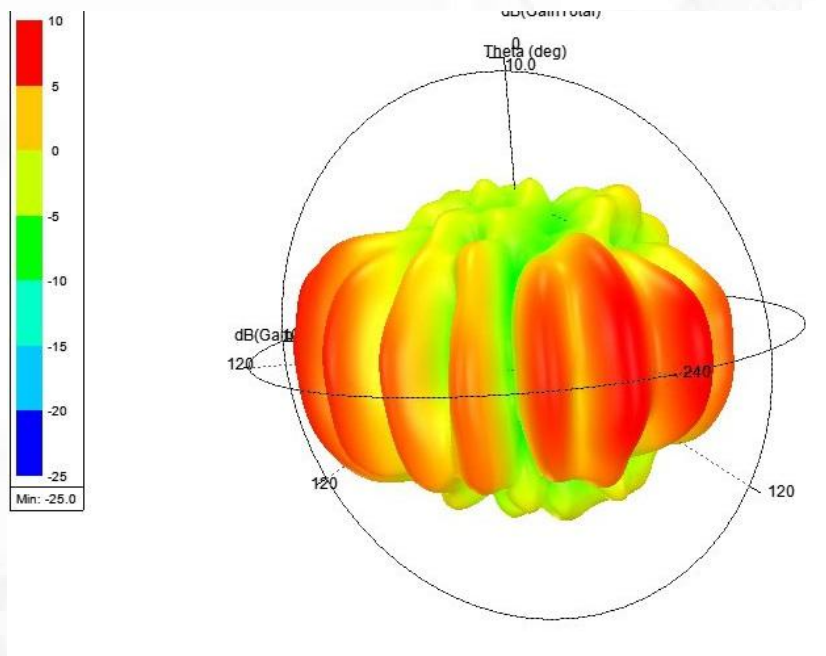

5.8 GHz